

**PRODUCT CONFIGURATOR
AT WWW.MERCOR.COM.PL**




- ▶ **EIS120**
- ▶ Certificate of constancy of performance 1488-CPR-0448/W.
- ▶ Dampers certified for compliance with EN 12101-8.
- ▶ Dampers qualified under EN 13501-4 and tested under EN 1366-10.
- ▶ Smoke exhaust dampers with the fire resistance independent of airflow direction and installation side.

3.1. application

The mcr FID S/V p/P, mcr FID S/V-M p/P smoke exhaust dampers are intended for installation in automatically operated fire ventilation systems. Dampers mcr FID S/V p/P are used in fire ventilation systems, while dampers marked mcr FID S/V-M p/P are used in mixed systems - fire and comfort ventilation systems. They support both single and multiple fire zones in a building. They prevent the spreading of fire, smoke and burning fumes into the adjacent zones. During normal system operation, the blade of the damper is open or closed depending on damper function. The damper blade opens in the zone on fire and dampers close in other zones.

3.2. design

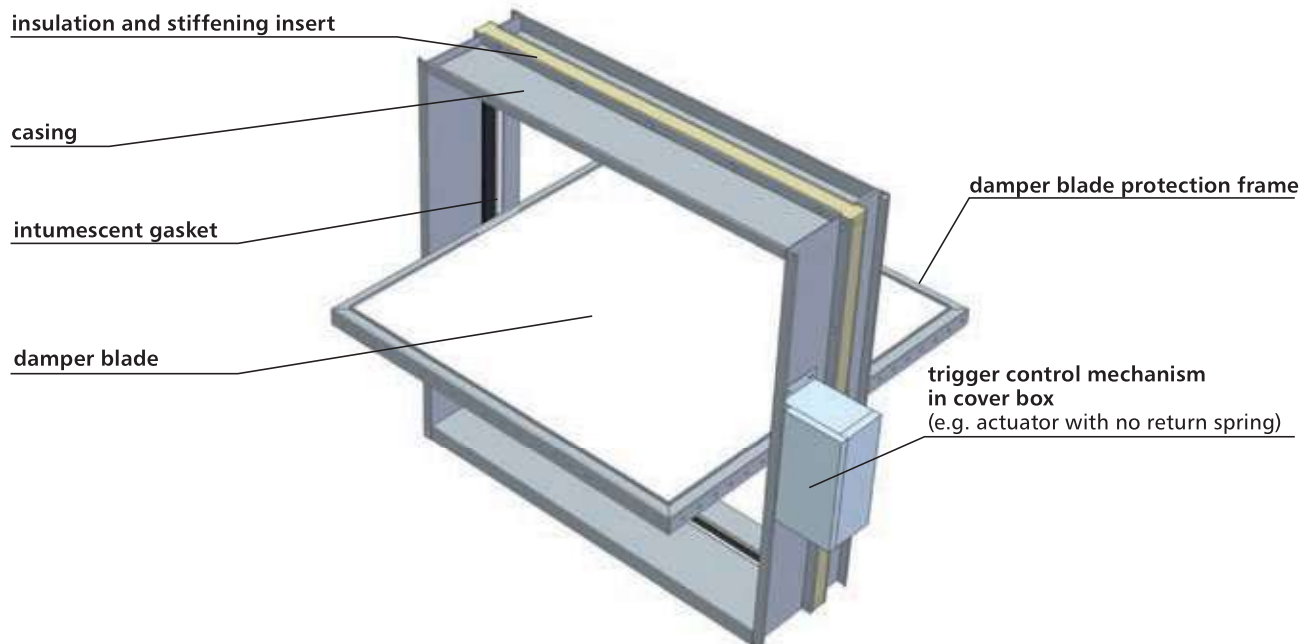

The mcr FID S/V p/P, mcr FID S/V-M p/P smoke exhaust dampers consist of a casing with a rectangular cross-section, made of two segments separated with a fire-proof panel with the cross-section of 20 x 40 mm, a moving damper blade and a remotely activated actuator. Standard damper casing is made of galvanised steel sheet. For chemically aggressive environments, special manufacture casing is used, in which steel elements are made of 1.4404 acid-proof steel sheet, while other elements are impregnated. The casing total length is at least 296 mm. Dampers may be made with an extension element, in which case the casing length is 400 mm.

The damper blade is made of a fire-proof panel with the total thickness of 40 mm, which is covered with a reinforcement steel profile. The inner side of the fire damper casing features an intumescent gasket. There are stop profiles fastened to the inner casing surface, which limit the rotating motion of the damper blade. The stop shaped are lined with a polyethylene ventilation-grade seal.

3.3. versions


3.3.1. mcr FID S/V p/P, mcr FID S/V-M p/P – smoke exhaust fire damper for multi-zone fire ventilation systems with an actuator – damper closing and opening with an actuator

During normal operation, the damper blade of the fire damper remains open or closed. In case of fire, the blade of the damper in the zone on fire opens, while in other zones the damper blades are closed - the dampers are remotely activated by applying the power supply.

The mcr FID S/V p/P, mcr FID S/V-M p/P dampers are equipped with a Belimo trigger control mechanisms **BE** or **BLE** series axial actuator, powered with 24 V AC/DC or 230 V AC. BLE-series actuators are used in mcr FID S/V-M p/P dampers with the surface of not more than 0.75 m² and in mcr FID S/V-M p/P with the surface of not more than 1.25 m².

BE and BLE series actuators are equipped with limit switches used to monitor the blade position. Furthermore, the mechanical position indicator is placed on the actuator.

Dampers with Belimo BE or BLE series actuators close and open when the voltage is applied to the actuator terminals.

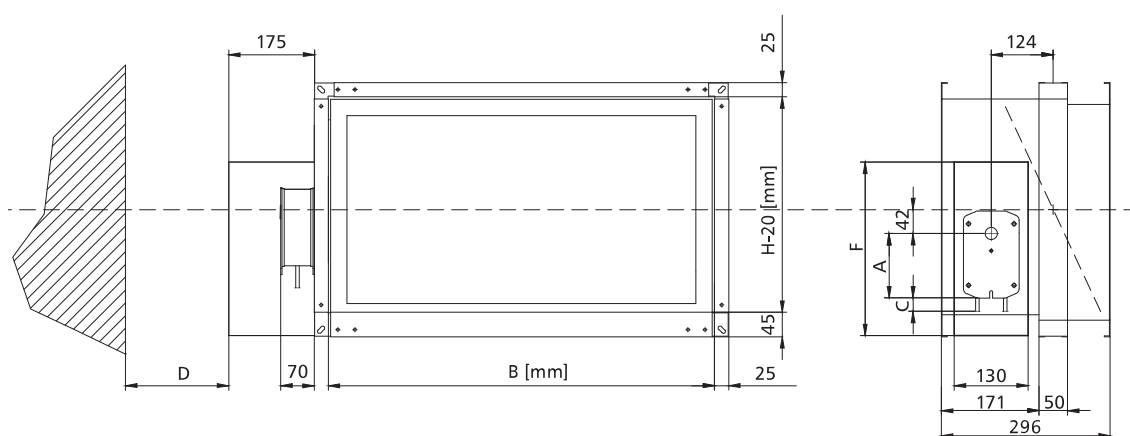


mechanism	A	C	D	E	F
BE	198	10	75	81	345
BLE	130	30	75	70	305

3.4. dimensions

Rectangular dampers:

- nominal width B: from 200 mm to 1500 mm
- nominal height H: from 200 mm to 1500 mm
- the maximum cross-section surface of one damper up to:
 - 1.5 m² for mcr FID S/V p/P dampers,
 - 1.25 m² for mcr FID S/V-M p/P dampers.

Apart from the standard dimensions, fire dampers may be manufactured with intermediate dimensions (in 1 mm increments, in the given range).

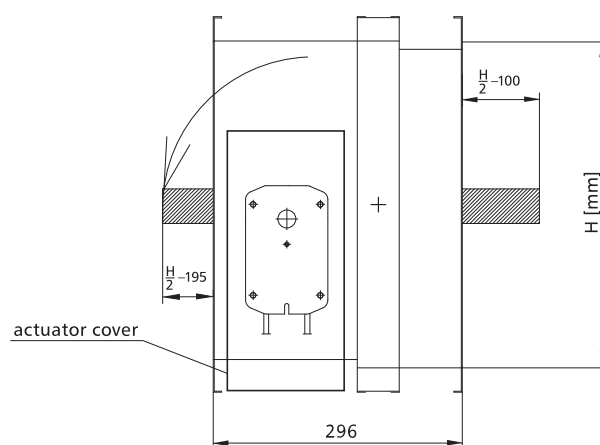


3.5. installation


The mcr FID S/V p/P rectangular dampers are EI120($V_{ew} i \leftrightarrow o$)S1000C₃₀₀AA multi-rated if installed in concrete partitions made of full bricks or cellular blocks with the thickness of at least 110 mm.

The mcr FID S/V-M p/P rectangular dampers are EI120($V_{ew} i \leftrightarrow o$)S1500C₁₀₀₀₀AA multi-rated if installed in concrete partitions made of full bricks or cellular blocks with the thickness of at least 110 mm.

3.5.1. preparation of installation openings

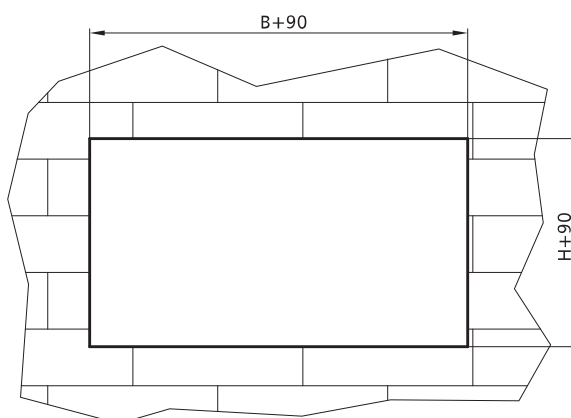


3.5.2. sample installation in concrete and masonry walls

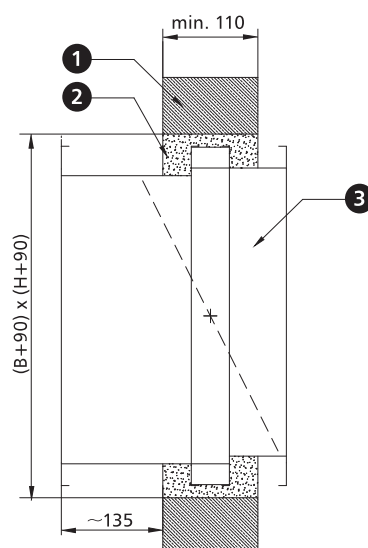


1. rigid wall - concrete, cellular concrete or bricks
2. sealing - concrete, cement or cement-lime masonry mortar*
3. fire damper mcr FID S

*it is possible to use a different sealing which ensures the required fire resistance

3.5.3. sample installation in sets

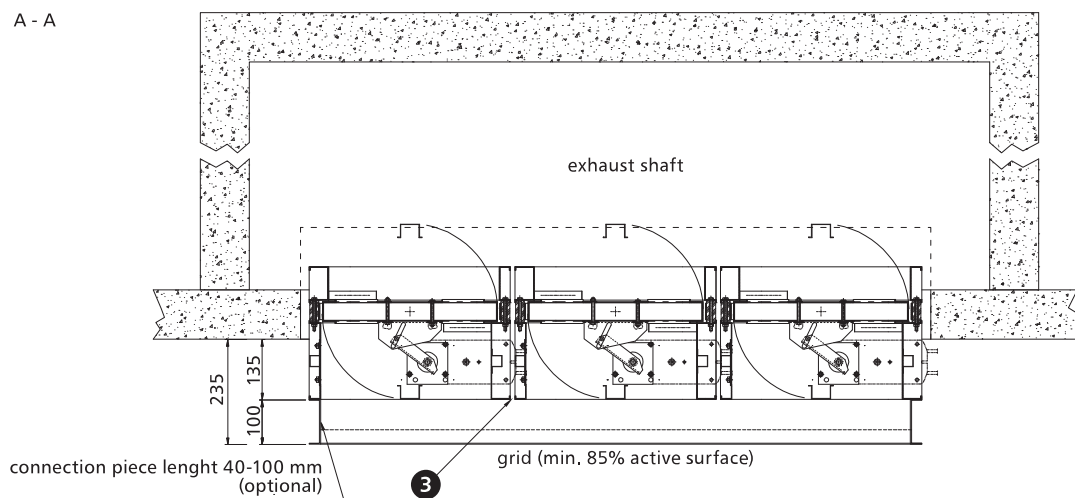

The height of H=400 mm ensures that the partition does not protrude outside the damper casing on the actuator side. To attach a guard grid (grill), a connection piece - lenght: 40-100 mm is required.

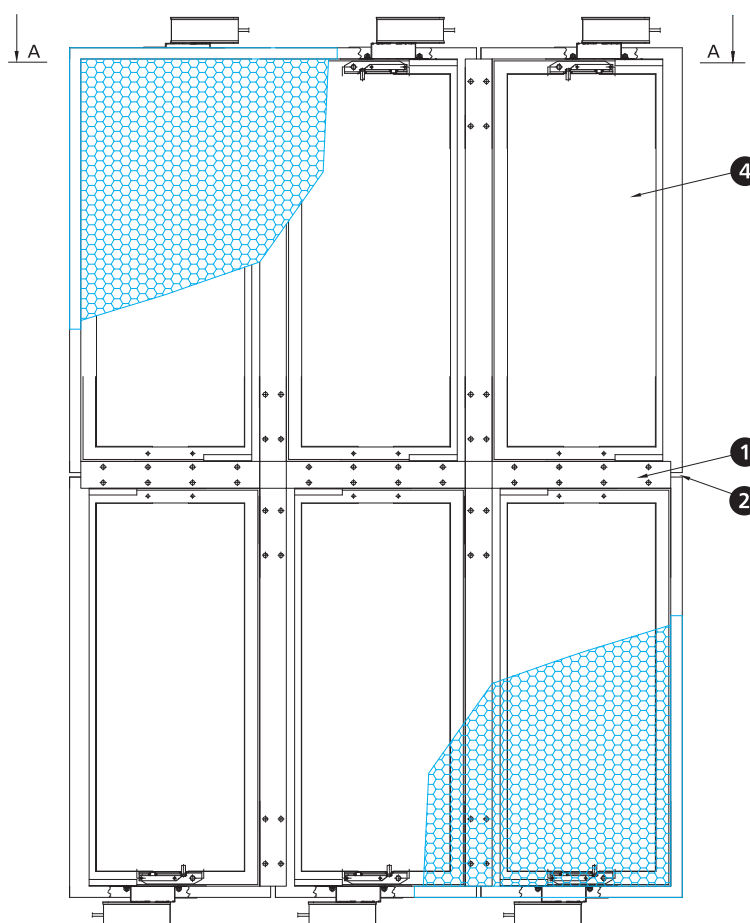

1. installation flat bar, width 60 mm
2. 10 mm gaps between damper flanges
3. fire resistant material, e.g. mineral wool with the density of at least 80 kg/m³, A1 class
4. fire damper mcr FID S

Installation of the damper with a vertical axis of rotation

Such installation must be clearly stated in the draft documentation and mentioned in the order. The dimensions of the damper BxH should be given as to the damper with a horizontal axis of rotation.

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		200					250					300					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.040	0.029	420	9	31	0.050	0.039	564	9	31	0.06	0.049	708	8	32
		6			631	21	41			847	19	42			1 063	19	42
		8			841	37	49			1 129	35	49			1 417	33	50
		10			1 051	58	55			1 411	54	55			1 771	52	55
	250	4	0.050	0.037	526	9	31	0.063	0.049	706	9	32	0.075	0.062	886	8	32
		6			788	21	42			1 058	19	43			1 328	18	42
		8			1 051	37	50			1 411	35	50			1 771	31	50
		10			1 314	57	55			1 764	54	56			2 214	49	56
	300	4	0.060	0.044	631	9	32	0.075	0.059	847	8	33	0.09	0.074	1 063	8	32
		6			946	20	43			1 270	19	43			1 594	17	43
		8			1 261	36	50			1 693	34	51			2 125	30	50
		10			1 577	56	56			2 117	53	56			2 657	47	56
	350	4	0.070	0.051	736	9	33	0.088	0.069	988	8	33	0.105	0.086	1 240	7	32
		6			1 104	20	43			1 482	19	44			1 860	16	43
		8			1 472	36	51			1 976	33	51			2 480	29	50
		10			1 840	56	57			2 470	52	57			3 100	45	56
	400	4	0.080	0.058	841	9	33	0.100	0.078	1 129	8	34	0.12	0.098	1 417	7	32
		6			1 261	19	43			1 693	19	44			2 125	15	42
		8			1 682	35	51			2 258	33	52			2 834	27	50
		10			2 102	54	57			2 822	52	57			3 542	42	56
	450	4	0.090	0.066	946	9	33	0.113	0.088	1 270	7	32	0.135	0.111	1 594	7	32
		6			1 419	19	44			1 905	17	43			2 391	15	43
		8			1 892	35	51			2 540	29	51			3 188	27	50
		10			2 365	54	57			3 175	46	56			3 985	42	56
	500	4	0.100	0.073	1 051	9	34	0.125	0.098	1 411	7	32	0.15	0.123	1 771	7	32
		6			1 577	19	44			2 117	16	43			2 657	15	43
		8			2 102	35	52			2 822	28	50			3 542	26	50
		10			2 628	54	58			3 528	44	56			4 428	41	56
	550	4	0.110	0.080	1 156	8	34	0.138	0.108	1 552	7	33	0.165	0.135	1 948	6	33
		6			1 734	19	44			2 328	16	43			2 922	14	43
		8			2 313	34	52			3 105	28	51			3 897	26	51
		10			2 891	53	58			3 881	44	57			4 871	40	56
	600	4	0.120	0.088	1 261	8	34	0.150	0.118	1 693	7	33	0.18	0.148	2 125	6	33
		6			1 892	19	45			2 540	15	43			3 188	14	43
		8			2 523	34	52			3 387	27	51			4 251	26	51
		10			3 154	53	58			4 234	42	56			5 314	40	57
	650	4	0.130	0.095	1 367	8	35	0.163	0.127	1 835	6	32	0.195	0.160	2 303	6	33
		6			2 050	19	45			2 752	14	43			3 454	14	44
		8			2 733	34	53			3 669	26	50			4 605	26	51
		10			3 416	53	59			4 586	40	56			5 756	40	57
	700	4	0.140	0.102	1 472	8	35	0.175	0.137	1 976	6	33	0.21	0.172	2 480	6	34
		6			2 208	19	45			2 964	14	43			3 720	14	44
		8			2 943	33	53			3 951	26	51			4 959	26	52
		10			3 679	52	59			4 939	40	56			6 199	40	57
	800	4	0.160	0.117	1 682	8	35	0.200	0.157	2 258	6	32	0.24	0.197	2 834	6	33
		6			2 523	18	45			3 387	14	43			4 251	14	44
		8			3 364	32	53			4 516	24	51			5 668	24	52
		10			4 205	50	59			5 645	38	56			7 085	38	57
	900	4	0.180	0.131	1 892	7	34	0.225	0.176	2 540	6	32	0.27	0.221	3 188	5	32
		6			2 838	16	44			3 810	13	43			4 782	12	42
		8			3 784	29	52			5 080	23	50			6 376	21	50
		10			4 730	45	58			6 350	36	56			7 970	32	56
	1000	4	0.200	0.146	2 102	7	34	0.250	0.196	2 822	6	32	0.3	0.246	3 542	5	32
		6			3 154	16	45			4 234	13	43			5 314	12	43
		8			4 205	29	52			5 645	22	50			7 085	21	50
		10			5 256	45	58			7 056	35	56			8 856	32	56
	1100	4	0.220	0.161	2 313	7	35	0.275	0.216	3 105	5	32	0.33	0.271	3 897	5	33
		6			3 469	16	45			4 657	12	43			5 845	12	43
		8			4 625	29	53			6 209	22	50			7 793	21	51
		10			5 782	45	59			7 762	34	56			9 742	32	56
	1200	4	0.240	0.175	2 523	8	37	0.300	0.235	3 387	5	33	0.36	0.295	4 251	9	40
		6			3 784	18	47			5 080	12	43			6 376	20	51
		8			5 046	29	53			6 774	22	51			8 502	36	58
		10			6 307	45	59			8 467	34	57			10 627	42	60
	1300	4	0.260	0.190	2 733	8	37	0.325	0.255	3 669	5	33	0.39	0.320	4 605	5	33
		6			4 100	18	47			5 504	12	43			6 908	12	44
		8			5 466	29	54			7 338	21	51			9 210	21	51
		10			6 833	45	59			9 173	33	57			11 513	32	57
	1400	4	0.280	0.204	2 943	7	36	0.350	0.274	3 951	5	33	0.42	0.344	4 959	5	34
		6			4 415	16	46			5 927	12	44			7 439	12	44
		8			5 887	29	54			7 903	21	51			9 919	21	52
		10			7 358	45	60			9 878	32	57			12 398	32	58
	1500	4	0.300	0.219	3 154	7	35	0.375	0.294	4 234	5	33	0.45	0.369	5 314	5	34
6		4 730			15	46	6 350			12	44	7 970			12	45	
8		6 307			27	53	8 467			21	51	10 627			21	52	
10		7 884			42	59	10 584			32	57	13 284			32	58	

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		350					400					450					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.070	0.059	852	8	32	0.080	0.069	996	7	31	0.090	0.079	1 140	7	31
		6			1 279	18	42			1 495	17	42			1 711	15	41
		8			1 705	32	50			1 993	29	49			2 281	26	49
		10			2 131	50	56			2 491	46	55			2 851	41	54
	250	4	0.088	0.074	1 066	7	31	0.100	0.087	1 246	6	29	0.113	0.099	1 426	6	29
		6			1 598	16	42			1 868	13	40			2 138	13	40
		8			2 131	29	50			2 491	23	47			2 851	22	47
		10			2 664	45	55			3 114	36	53			3 564	35	53
	300	4	0.105	0.089	1 279	7	32	0.120	0.104	1 495	6	30	0.135	0.119	1 711	5	30
		6			1 918	16	43			2 242	13	41			2 566	12	40
		8			2 557	28	50			2 989	24	48			3 421	22	48
		10			3 197	44	56			3 737	37	54			4 277	34	54
	350	4	0.123	0.104	1 492	7	32	0.140	0.121	1 744	6	30	0.158	0.139	1 996	5	30
		6			2 238	15	42			2 616	13	41			2 994	12	41
		8			2 984	26	50			3 488	22	48			3 992	21	48
		10			3 730	41	56			4 360	35	54			4 990	33	54
	400	4	0.140	0.118	1 705	6	31	0.160	0.138	1 993	6	31	0.180	0.158	2 281	5	30
		6			2 557	13	41			2 989	13	41			3 421	12	41
		8			3 410	24	49			3 986	22	49			4 562	21	48
		10			4 262	37	55			4 982	35	55			5 702	32	54
	450	4	0.158	0.133	1 918	5	30	0.180	0.156	2 242	5	30	0.203	0.178	2 566	4	29
		6			2 877	12	41			3 363	12	41			3 849	10	40
		8			3 836	22	48			4 484	21	48			5 132	18	47
		10			4 795	34	54			5 605	32	54			6 415	28	53
	500	4	0.175	0.148	2 131	5	31	0.200	0.173	2 491	5	30	0.225	0.198	2 851	4	29
		6			3 197	12	41			3 737	11	40			4 277	9	39
		8			4 262	22	49			4 982	19	48			5 702	17	47
		10			5 328	34	55			6 228	30	54			7 128	26	52
	550	4	0.193	0.163	2 557	5	30	0.220	0.190	2 740	5	30	0.248	0.218	3 136	4	29
		6			3 836	12	41			4 110	11	41			4 704	9	40
		8			5 115	21	48			5 481	19	48			6 273	17	47
		10			6 394	32	54			6 851	30	54			7 841	26	53
	600	4	0.210	0.178	2 557	5	30	0.240	0.208	2 989	4	28	0.270	0.238	3 421	4	29
		6			3 836	10	40			4 484	8	37			5 132	9	40
		8			5 115	19	48			5 979	14	45			6 843	17	47
		10			6 394	29	53			7 474	27	53			8 554	26	53
	650	4	0.228	0.192	2 771	5	30	0.260	0.225	3 239	4	30	0.293	0.257	3 707	4	30
		6			4 156	10	40			4 858	10	40			5 560	9	40
		8			5 541	19	48			6 477	17	48			7 413	17	48
		10			6 926	29	54			8 096	27	53			9 266	26	54
	700	4	0.245	0.207	2 984	5	30	0.28	0.242	3 488	4	30	0.315	0.277	3 992	4	30
		6			4 476	10	41			5 232	10	40			5 988	9	40
		8			5 967	19	48			6 975	17	48			7 983	16	48
		10			7 459	29	54			8 719	27	54			9 979	25	53
	800	4	0.280	0.237	3 410	4	30	0.32	0.277	3 986	4	30	0.360	0.317	4 562	4	29
		6			5 115	10	41			5 979	9	41			6 843	9	40
		8			6 820	18	48			7 972	17	48			9 124	16	47
		10			8 525	28	54			9 965	26	54			11 405	25	53
	900	4	0.315	0.266	3 836	4	31	0.360	0.311	4 484	6	35	0.405	0.356	5 132	4	29
		6			5 754	10	41			6 726	12	44			7 698	9	40
		8			7 672	18	49			8 968	26	54			10 264	16	47
		10			9 590	28	55			11 210	33.4	58			12 830	25	53
	1000	4	0.350	0.296	4 262	4	30	0.400	0.346	4 982	4	31	0.450	0.396	5 702	4	29
		6			6 394	9	41			7 474	9	42			8 554	9	40
		8			8 525	17	48			9 965	17	49			11 405	16	47
		10			10 656	26	54			12 456	26	55			14 256	25	53
	1100	4	0.385	0.326	4 689	4	32	0.440	0.381	5 481	4	31	0.495	0.436	6 273	4	29
		6			7 033	10	42			8 221	9	42			9 409	9	39
		8			9 377	18	50			10 961	17	49			12 545	15	47
		10			11 722	28	56			13 702	26	55			15 682	24	53
	1200	4	0.420	0.355	5 115	4	31	0.480	0.415	5 979	4	31	0.540	0.475	6 843	4	29
		6			7 672	9	41			8 968	9	42			10 264	9	39
		8			10 230	16	49			11 958	16	49			13 686	15	47
		10			12 787	25	54			14 947	25	55			17 107	24	53
	1300	4	0.455	0.385	5 541	4	32	0.520	0.450	6 477	4	32	0.585	0.515	7 413	4	28
		6			8 312	10	43			9 716	9	42			11 120	8	39
8		11 082			17	50	12 954			16	50	14 826			15	46	
10		13 853			27	56	16 193			25	55	18 533			23	52	
1400	4	0.490	0.414	5 967	4	32	0.560	0.484	6 975	4	32	0.630	0.554	7 983	4	28	
	6			8 951	10	43			10 463	9	43			11 975	8	39	
	8			11 935	17	50			13 951	16	50			15 967	15	46	
	10			14 918	27	56			17 438	25	56			19 958	23	52	
1500	4	0.525	0.444	6 394	4	32	0.600	0.519	7 474	4	32	0.675	0.594	8 554	4	28	
	6			9 590	9	43			11 210	9	43			12 830	8	38	
	8			12 787	17	50			14 947	16	50			17 107	14	46	
	10			15 984	26	56			18 684	25	56			21 384	22	51	

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		500					550					600					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.1	0.089	1 284	6	29	0.110	0.099	1 428	5	29	0.120	0.109	1 572	5	29
		6			1 927	13	40			2 143	12	39			2 359	12	39
		8			2 569	22	47			2 857	21	47			3 145	21	47
		10			3 211	35	53			3 571	33	53			3 931	32	53
	250	4	0.125	0.112	1 606	6	30	0.138	0.124	1 786	5	30	0.150	0.137	1 966	5	30
		6			2 408	13	41			2 678	12	40			2 948	12	40
		8			3 211	22	48			3 571	21	48			3 931	21	48
		10			4 014	35	54			4 464	33	53			4 914	32	54
	300	4	0.15	0.134	1 927	5	30	0.165	0.149	2 143	5	30	0.180	0.164	2 359	5	30
		6			2 890	12	41			3 214	12	41			3 538	11	40
		8			3 853	21	48			4 285	21	48			4 717	19	48
		10			4 817	33	54			5 357	32	54			5 897	30	53
	350	4	0.175	0.156	2 248	5	30	0.193	0.174	2 500	5	31	0.210	0.191	2 752	5	30
		6			3 372	12	41			3 750	12	41			4 128	10	40
		8			4 496	21	48			5 000	21	49			5 504	19	48
		10			5 620	32	54			6 250	32	55			6 880	29	54
	400	4	0.2	0.178	2 569	5	30	0.220	0.198	2 857	5	30	0.240	0.218	3 145	4	30
		6			3 853	11	41			4 285	10	41			4 717	10	41
		8			5 138	19	48			5 714	19	48			6 290	18	48
		10			6 422	30	54			7 142	29	54			7 862	28	54
450	4	0.225	0.201	2 890	4	29	0.248	0.223	3 214	4	29	0.270	0.246	3 538	4	30	
	6			4 335	9	39			4 821	9	40			5 307	9	40	
	8			5 780	17	47			6 428	17	47			7 076	17	48	
	10			7 225	26	52			8 035	26	53			8 845	26	53	
500	4	0.250	0.223	3 211	4	27	0.275	0.248	3 571	4	29	0.300	0.273	3 931	4	29	
	6			4 817	8	38			5 357	9	39			5 897	9	39	
	8			6 422	14	45			7 142	15	47			7 862	15	47	
	10			8 028	20	50			8 928	24	52			9 828	24	53	
550	4	0.275	0.245	3 853	3	27	0.303	0.273	4 285	4	28	0.330	0.300	4 717	4	28	
	6			5 780	8	37			6 428	8	38			7 076	8	39	
	8			7 707	13	45			8 571	14	46			9 435	14	46	
	10			9 634	21	51			10 714	22	52			11 794	22	52	
600	4	0.3	0.268	3 853	3	27	0.330	0.298	4 285	3	28	0.360	0.328	4 717	3	28	
	6			5 780	8	38			6 428	8	38			7 076	8	39	
	8			7 707	13	45			8 571	13	46			9 435	13	46	
	10			9 634	21	51			10 714	21	51			11 794	21	52	
650	4	0.325	0.290	4 175	4	31	0.358	0.322	4 643	3	28	0.390	0.355	5 111	3	28	
	6			6 262	10	41			6 964	8	38			7 666	8	39	
	8			8 349	17	49			9 285	13	46			10 221	13	46	
	10			10 436	21	51			11 606	21	52			12 776	21	52	
700	4	0.350	0.312	4 496	3	28	0.385	0.347	5 000	3	28	0.420	0.382	5 504	3	29	
	6			6 744	8	38			7 500	8	39			8 256	8	39	
	8			8 991	13	46			9 999	13	46			11 007	13	47	
	10			11 239	21	52			12 499	21	52			13 759	21	52	
800	4	0.4	0.357	5 138	3	28	0.440	0.397	5 714	3	29	0.480	0.437	6 290	3	29	
	6			7 707	8	39			8 571	8	39			9 435	8	40	
	8			10 276	13	46			11 428	13	47			12 580	13	47	
	10			12 845	21	52			14 285	21	53			15 725	21	53	
900	4	0.45	0.401	5 780	3	28	0.495	0.446	6 428	3	29	0.540	0.491	7 076	3	30	
	6			8 670	8	39			9 642	8	40			10 614	8	38	
	8			11 560	13	46			12 856	13	47			14 152	13	45	
	10			14 450	21	52			16 070	21	53			17 690	21	51	
1000	4	0.5	0.446	6 422	3	28	0.550	0.496	6 428	3	30	0.600	0.546	7 862	3	30	
	6			9 634	8	39			9 642	8	40			11 794	8	41	
	8			12 845	13	46			12 856	13	48			15 725	13	48	
	10			16 056	21	52			16 070	21	54			19 656	21	54	
1100	4	0.55	0.491	7 065	4	29	0.605	0.546	7 857	4	31	0.660	0.601	8 649	3	31	
	6			10 597	8	39			11 785	8	41			12 973	8	41	
	8			14 129	14	47			15 713	14	49			17 297	13	49	
	10			17 662	22	53			19 642	22	55			21 622	21	54	
1200	4	0.6	0.535	7 707	3	27	0.660	0.595	8 571	3	30	0.720	0.655	9 435	3	30	
	6			11 560	7	38			12 856	7	40			14 152	7	40	
	8			15 414	13	45			17 142	13	48			18 870	12	48	
	10			19 267	20	51			21 427	20	54			23 587	19	54	
1300	4	0.65	0.580	8 349	3	27	0.715	0.645	9 285	3	30	0.780	0.710	10 221	3	30	
	6			12 524	7	38			13 928	7	41			15 332	7	41	
	8			16 698	13	45			18 570	13	48			20 442	12	48	
	10			20 873	20	51			23 213	20	54			25 553	19	54	
1400	4	0.7	0.624	8 991	3	27	0.770	0.694	9 999	3	31	0.840	0.764	11 007	3	30	
	6			13 487	7	38			14 999	7	41			16 511	7	41	
	8			17 983	13	45			19 999	13	49			22 015	12	48	
	10			22 478	20	51			24 998	20	54			27 518	19	54	
1500	4	0.75	0.669	9 634	3	27	0.825	0.744	10 714	3	31	0.900	0.819	11 794	3	31	
	6			14 450	7	38			16 070	7	41			17 690	7	41	
	8			19 267	13	45			21 427	13	49			23 587	12	49	
	10			24 084	20	51			26 784	20	55			29 484	19	54	

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		650						700					750				
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.130	0.119	1 716	5	29	0.140	0.129	1 860	5	29	0.150	0.139	2 004	5	29
		6			2 575	11	39			2 791	11	40			3 007	11	40
		8			3 433	20	47			3 721	20	47			4 009	20	47
		10			4 291	31	53			4 651	31	53			5 011	31	53
	250	4	0.163	0.149	2 146	5	30	0.175	0.162	2 326	5	30	0.188	0.174	2 506	5	30
		6			3 218	11	40			3 488	11	41			3 758	11	41
		8			4 291	20	48			4 651	20	48			5 011	20	48
		10			5 364	31	53			5 814	31	54			6 264	31	54
	300	4	0.195	0.179	2 575	5	30	0.210	0.194	2 791	4	29	0.225	0.209	3 007	4	30
		6			3 862	10	40			4 186	10	40			4 510	10	40
		8			5 149	19	48			5 581	18	47			6 013	18	48
		10			6 437	29	53			6 977	28	53			7 517	28	54
	350	4	0.228	0.209	3 004	4	30	0.245	0.226	3 256	4	30	0.263	0.244	3 508	4	30
		6			4 506	10	40			4 884	10	40			5 262	10	41
		8			6 008	18	48			6 512	17	48			7 016	17	48
		10			7 510	28	54			8 140	27	53			8 770	27	54
	400	4	0.260	0.238	3 433	4	30	0.280	0.258	3 721	4	30	0.300	0.278	4 009	4	31
		6			5 149	10	41			5 581	10	41			6 013	10	41
		8			6 866	18	48			7 442	17	48			8 018	17	49
		10			8 582	28	54			9 302	27	54			10 022	27	54
	450	4	0.293	0.268	3 862	4	30	0.315	0.291	4 186	4	29	0.338	0.313	4 510	4	30
		6			5 793	9	40			6 279	9	40			6 765	9	40
		8			7 724	17	48			8 372	15	47			9 020	15	48
		10			9 655	26	54			10 465	24	53			11 275	24	53
	500	4	0.325	0.298	4 291	4	29	0.350	0.323	4 651	4	29	0.375	0.348	5 011	4	29
		6			6 437	9	40			6 977	8	40			7 517	8	40
		8			8 582	15	47			9 302	15	47			10 022	15	47
		10			10 728	24	53			11 628	23	53			12 528	23	53
	550	4	0.358	0.328	5 149	4	29	0.385	0.355	5 116	4	29	0.413	0.383	5 512	4	29
		6			7 724	8	39			7 674	8	39			8 268	8	40
		8			10 299	14	47			10 233	14	47			11 025	14	47
		10			12 874	22	52			12 791	22	53			13 781	22	53
	600	4	0.390	0.358	5 149	3	28	0.420	0.388	5 581	3	29	0.450	0.418	6 013	3	29
		6			7 724	8	39			8 372	8	39			9 020	8	40
		8			10 299	13	46			11 163	13	47			12 027	13	47
		10			12 874	21	52			13 954	21	53			15 034	21	53
	650	4	0.423	0.387	5 579	3	28	0.455	0.420	6 047	3	28	0.488	0.452	6 515	3	28
		6			8 368	7	39			9 070	7	39			9 772	7	39
		8			11 157	13	46			12 093	13	46			13 029	12	46
		10			13 946	20	52			15 116	20	52			16 286	19	52
	700	4	0.455	0.417	6 008	3	28	0.490	0.452	6 512	3	29	0.525	0.487	7 016	3	28
		6			9 012	7	39			9 768	7	39			10 524	7	39
		8			12 015	13	46			13 023	13	47			14 031	12	46
		10			15 019	20	52			16 279	20	53			17 539	19	52
	800	4	0.520	0.477	6 866	3	27	0.560	0.517	7 442	4	29	0.600	0.557	8 018	3	28
		6			10 299	6	38			11 163	7	37			12 027	6	39
		8			13 732	12	45			14 884	11	43			16 036	12	46
		10			17 165	18	51			18 605	16	47			20 045	18	52
900	4	0.585	0.536	7 724	3	26	0.630	0.581	8 372	3	27	0.675	0.626	9 020	3	27	
	6			11 586	6	36			12 558	6	37			13 530	6	38	
	8			15 448	10	44			16 744	10	45			18 040	10	45	
	10			19 310	16	50			20 930	16	51			22 550	16	51	
1000	4	0.650	0.596	8 582	3	26	0.700	0.646	9 302	3	27	0.750	0.696	10 022	3	28	
	6			12 874	6	36			13 954	6	38			15 034	6	38	
	8			17 165	10	44			18 605	10	45			20 045	10	46	
	10			21 456	16	50			23 256	16	51			25 056	16	52	
1100	4	0.715	0.656	9 441	3	29	0.770	0.711	10 233	3	31	0.825	0.766	11 025	3	28	
	6			14 161	8	40			15 349	8	42			16 537	6	39	
	8			18 881	13	47			20 465	13	49			22 049	10	46	
	10			23 602	21	53			25 582	21	55			27 562	16	52	
1200	4	0.780	0.715	10 299	3	28	0.840	0.775	11 163	3	30	0.900	0.835	12 027	2	28	
	6			15 448	7	39			16 744	7	41			18 040	5	38	
	8			20 598	12	46			22 326	12	48			24 054	10	46	
	10			25 747	19	52			27 907	19	54			30 067	15	52	
1300	4	0.845	0.775	11 157	3	28	0.910	0.840	12 093	3	31	0.975	0.905	13 029	2	28	
	6			16 736	7	39			18 140	7	41			19 544	5	39	
	8			22 314	12	46			24 186	12	49			26 058	10	46	
	10			27 893	19	52			30 233	19	55			32 573	15	52	
1400	4	0.910	0.834	12 015	3	28	0.980	0.904	13 023	3	31	1.050	0.974	14 031	2	28	
	6			18 023	7	39			19 535	7	42			21 047	5	39	
	8			24 031	12	46			26 047	12	49			28 063	10	46	
	10			30 038	19	52			32 558	19	55			35 078	15	52	
1500	4	0.975	0.894	12 874	3	28	1.050	0.969	13 954	3	31	1.125	1.044	15 034	3	30	
	6			19 310	7	39			20 930	7	42			22 550	6	41	
	8			25 747	12	46			27 907	12	49			30 067	11	48	
	10			32 184	19	52			34 884	19	55			37 584	17	54	

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]																	
		800						850					900						
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]		
width B [mm]	200	4	0.160	0.149	2 148	5	0.170	0.159	2 292	5	0.180	0.169	2 436	5	0.212	30			
		6			3 223	11			40	3 439			11	40			3 655	11	40
		8			4 297	19			47	4 585			19	48			4 873	19	48
		10			5 371	30			53	5 731			30	53			6 091	30	54
	250	4	0.200	0.187	2 686	5	0.213	0.199	2 866	5	0.225	0.212	3 046	5	0.254	31			
		6			4 028	11			41	4 298			11	41			4 568	11	41
		8			5 371	19			48	5 731			19	49			6 091	19	49
		10			6 714	30			54	7 164			30	54			7 614	30	55
	300	4	0.240	0.224	3 223	4	0.255	0.239	3 439	4	0.270	0.254	3 655	4	0.296	30			
		6			4 834	10			41	5 158			10	41			5 482	10	41
		8			6 445	18			48	6 877			18	48			7 309	17	48
		10			8 057	28			54	8 597			28	54			9 137	27	54
	350	4	0.280	0.261	3 760	4	0.298	0.279	4 012	4	0.315	0.296	4 264	4	0.338	30			
		6			5 640	10			41	6 018			10	41			6 396	9	41
		8			7 520	17			48	8 024			17	49			8 528	17	48
		10			9 400	27			54	10 030			27	54			10 660	26	54
	400	4	0.320	0.298	4 297	4	0.340	0.318	4 585	4	0.360	0.338	4 873	4	0.381	30			
		6			6 445	10			41	6 877			10	42			7 309	9	41
		8			8 594	17			49	9 170			17	49			9 746	16	48
		10			10 742	27			55	11 462			27	55			12 182	25	54
	450	4	0.360	0.336	4 834	4	0.383	0.358	5 158	4	0.405	0.381	5 482	3	0.423	29			
		6			7 251	8			39	7 737			8	40			8 223	8	39
		8			9 668	14			47	10 316			14	47			10 964	13	47
		10			12 085	22			53	12 895			22	53			13 705	21	52
	500	4	0.400	0.373	5 371	4	0.425	0.398	5 731	4	0.450	0.423	6 091	3	0.465	29			
		6			8 057	8			40	8 597			8	40			9 137	8	40
		8			10 742	14			47	11 462			14	47			12 182	13	47
		10			13 428	22			53	14 328			22	53			15 228	21	53
	550	4	0.440	0.410	5 908	3	0.468	0.438	6 304	3	0.495	0.465	6 700	3	0.508	29			
		6			8 862	8			40	9 456			8	40			10 050	7	39
		8			11 817	13			47	12 609			13	47			13 401	13	47
		10			14 771	21			53	15 761			21	53			16 751	20	53
	600	4	0.480	0.448	6 445	3	0.510	0.478	6 877	3	0.540	0.508	7 309	3	0.550	29			
		6			9 668	7			39	10 316			7	40			10 964	7	39
		8			12 891	13			47	13 755			13	47			14 619	12	47
		10			16 114	20			53	17 194			20	53			18 274	19	52
	650	4	0.520	0.485	6 983	3	0.553	0.517	7 451	3	0.585	0.550	7 919	3	0.592	29			
		6			10 474	7			39	11 176			7	39			11 878	7	39
		8			13 965	12			46	14 901			12	47			15 837	12	47
		10			17 456	19			52	18 626			19	53			19 796	19	53
	700	4	0.560	0.522	7 520	3	0.595	0.557	8 024	3	0.630	0.592	8 528	3	0.677	27			
		6			11 280	6			39	12 036			6	39			12 792	6	38
		8			15 039	12			46	16 047			12	46			17 055	10	45
		10			18 799	18			52	20 059			18	52			21 319	16	51
	800	4	0.640	0.597	8 594	3	0.680	0.637	9 170	3	0.720	0.677	9 746	3	0.716	28			
		6			12 891	6			38	13 755			6	38			14 619	6	38
		8			17 188	10			45	18 340			10	45			19 492	10	46
		10			21 485	16			51	22 925			16	51			24 365	16	51
900	4	0.720	0.671	9 668	3	0.765	0.716	10 316	3	0.810	0.761	10 964	3	0.846	28				
	6			14 502	6			38	15 474			6	38			16 446	6	39	
	8			19 336	10			46	20 632			10	46			21 928	10	46	
	10			24 170	16			51	25 790			16	52			27 410	16	52	
1000	4	0.800	0.746	10 742	3	0.850	0.796	11 462	3	0.900	0.846	12 182	3	0.931	29				
	6			16 114	6			39	17 194			6	39			18 274	6	39	
	8			21 485	10			46	22 925			10	46			24 365	10	47	
	10			26 856	16			52	28 656			16	52			30 456	16	52	
1100	4	0.880	0.821	11 817	3	0.935	0.876	12 609	3	0.990	0.931	13 401	3	1.015	29				
	6			17 725	6			39	18 913			6	39			20 101	6	40	
	8			23 633	10			46	25 217			10	47			26 801	10	47	
	10			29 542	16			52	31 522			16	53			33 502	16	53	
1200	4	0.960	0.895	12 891	2	1.020	0.955	13 755	2	1.080	1.015	14 619	2	1.100	28				
	6			19 336	5			39	20 632			5	39			21 928	5	38	
	8			25 782	10			46	27 510			10	46			29 238	9	46	
	10			32 227	15			52	34 387			15	52			36 547	14	51	
1300	4	1.040	0.970	13 965	2	1.105	1.035	14 901	2	1.170	1.100	15 837	2	1.260	1.184				
	6			20 948	5			39	22 352			5	39			23 756	5	39	
	8			27 930	10			46	29 802			10	47			31 674	10	47	
	10			34 913	15			52	37 253			15	52			39 593	15	53	
1400	4	1.120	1.044	15 039	2	1.190	1.114	16 047	3	1.260	1.184	17 055	2	1.350	1.269				
	6			22 559	5			39	24 071			6	40			25 583	5	39	
	8			30 079	10			47	32 095			10	48			34 111	9	46	
	10			37 598	15			52	40 118			16	54			42 638	14	52	
1500	4	1.200	1.119	16 114	3	1.275	1.194	17 194	3	1.350	1.269	18 274	2	1.440	1.350				
	6			24 170	6			41	25 790			6	41			27 410	5	40	
	8			32 227	11			49	34 387			10	48			36 547	10	48	
	10			40 284	17			54	42 984			16	54			45 684	15	53	

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		1000					1100					1200					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.200	0.189	2 724	5	30	0.220	0.209	3 012	5	30	0.240	0.229	3 300	4	30
		6			4 087	10	40			4 519	10	41			4 951	10	41
		8			5 449	19	48			6 025	19	48			6 601	18	48
		10			6 811	29	54			7 531	29	54			8 251	28	54
	250	4	0.250	0.237	3 406	5	31	0.275	0.262	3 766	4	31	0.300	0.287	4 126	4	31
		6			5 108	10	41			5 648	10	41			6 188	10	41
		8			6 811	19	49			7 531	18	49			8 251	17	49
		10			8 514	29	55			9 414	28	55			10 314	27	55
	300	4	0.300	0.284	4 087	4	31	0.330	0.314	4 519	4	31	0.360	0.344	4 951	4	31
		6			6 130	10	41			6 778	10	42			7 426	9	42
		8			8 173	17	49			9 037	17	49			9 901	17	49
		10			10 217	27	54			11 297	27	55			12 377	26	55
	350	4	0.350	0.331	4 768	4	31	0.385	0.366	5 272	4	31	0.420	0.401	5 776	4	31
		6			7 152	9	41			7 908	9	42			8 664	9	41
		8			9 536	17	49			10 544	17	49			11 552	15	49
		10			11 920	26	55			13 180	26	55			14 440	24	54
	400	4	0.400	0.378	5 449	3	28	0.440	0.418	6 025	3	28	0.480	0.458	6 601	3	29
		6			8 173	7	39			9 037	7	39			9 901	7	39
		8			10 898	13	46			12 050	13	46			13 202	13	47
		10			13 622	20	52			15 062	20	52			16 502	20	53
	450	4	0.450	0.426	6 130	3	28	0.495	0.471	6 778	3	29	0.540	0.516	7 426	3	29
		6			9 195	7	39			10 167	7	39			11 139	7	40
		8			12 260	13	47			13 556	13	47			14 852	13	47
		10			15 325	20	52			16 945	20	53			18 565	20	53
	500	4	0.500	0.473	6 811	3	29	0.550	0.523	7 531	3	29	0.600	0.573	8 251	3	30
		6			10 217	7	39			11 297	7	40			12 377	7	40
		8			13 622	13	47			15 062	13	47			16 502	13	48
		10			17 028	20	53			18 828	20	53			20 628	20	54
	550	4	0.550	0.520	7 492	3	29	0.605	0.575	8 284	3	30	0.660	0.630	9 076	3	30
		6			11 238	7	40			12 426	7	40			13 614	7	41
		8			14 985	13	47			16 569	13	48			18 153	13	48
		10			18 731	20	53			20 711	20	54			22 691	20	54
	600	4	0.600	0.568	8 173	3	29	0.660	0.628	9 037	3	29	0.720	0.688	9 901	3	29
		6			12 260	7	40			13 556	6	39			14 852	6	40
		8			16 347	12	47			18 075	12	47			19 803	12	47
		10			20 434	19	53			22 594	18	53			24 754	18	53
	650	4	0.650	0.615	8 855	3	29	0.715	0.680	9 791	3	29	0.780	0.745	10 727	3	30
		6			13 282	7	40			14 686	6	40			16 090	6	40
		8			17 709	12	47			19 581	12	47			21 453	12	48
		10			22 136	19	53			24 476	18	53			26 816	18	53
	700	4	0.700	0.662	9 536	3	27	0.770	0.732	10 544	2	27	0.840	0.802	11 552	2	27
		6			14 304	6	38			15 816	5	38			17 328	5	38
		8			19 071	10	46			21 087	10	45			23 103	10	46
		10			23 839	16	51			26 359	15	51			28 879	15	51
	800	4	0.800	0.757	10 898	3	28	0.880	0.837	12 050	2	28	0.960	0.917	13 202	2	28
		6			16 347	6	39			18 075	5	38			19 803	5	39
		8			21 796	10	46			24 100	10	46			26 404	10	46
		10			27 245	16	52			30 125	15	52			33 005	15	52
900	4	0.900	0.851	12 260	3	29	0.990	0.941	13 556	3	29	1.080	1.031	14 852	2	29	
	6			18 390	6	39			20 334	6	40			22 278	5	39	
	8			24 520	10	47			27 112	10	47			29 704	10	47	
	10			30 650	16	52			33 890	16	53			37 130	15	52	
1000	4	1.000	0.946	13 622	3	29	1.100	1.046	15 062	2	29	1.200	1.146	16 502	2	28	
	6			20 434	6	40			22 594	5	39			24 754	5	39	
	8			27 245	10	47			30 125	10	47			33 005	9	46	
	10			34 056	16	53			37 656	15	52			41 256	14	52	
1100	4	1.100	1.041	14 985	3	29	1.210	1.151	16 569	2	29	1.320	1.261	18 153	2	29	
	6			22 477	6	40			24 853	5	40			27 229	5	39	
	8			29 969	10	48			33 137	10	47			36 305	9	47	
	10			37 462	16	53			41 422	15	53			45 382	14	52	
1200	4	1.200	1.135	16 347	2	28	1.320	1.255	18 075	10	47	1.440	1.375	19 803	2	28	
	6			24 520	5	39			27 112	22	58			29 704	5	39	
	8			32 694	9	46			36 150	38	66			39 606	8	46	
	10			40 867	14	52			45 187	14	52			49 507	13	52	
1300	4	1.300	1.230	17 709	2	28	1.430	1.360	19 581	2	28						
	6			26 564	5	39			29 372	5	38						
	8			35 418	9	46			39 162	8	46						
	10			44 273	14	52			48 953	13	52						
1400	4	1.400	1.324	19 071	2	29											
	6			28 607	5	39											
	8			38 143	9	47											
	10			47 678	14	53											
1500	4	1.500	1.419	20 434	2	28											
	6			30 650	5	39											
	8			40 867	8	46											
	10			51 084	13	52											

3.6. technical parameters of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross-section [m²]
Se – damper active cross-section [m²]

Q – flow [m³/h]
dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]																	
		1300					1400					1500							
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]		
width B [mm]	200	4	0.260	0.249	3 588	4	0.280	0.269	3 876	4	0.300	0.289	0.300	0.289	4 164	4	29		
		6			5 383	9			40	5 815					9	40	6 247	9	40
		8			7 177	17			48	7 753					16	47	8 329	15	47
		10			8 971	26			53	9 691					25	53	10 411	24	53
	250	4	0.325	0.312	4 486	4	0.350	0.337	4 846	4	0.375	0.362	0.375	0.362	4 164	4	30		
		6			6 728	9			41	7 268					9	40	6 247	8	40
		8			8 971	17			49	9 691					15	48	8 329	15	48
		10			11 214	26			54	12 114					24	54	10 411	23	53
	300	4	0.390	0.374	5 383	4	0.420	0.404	5 815	4	0.450	0.434	0.450	0.434	6 247	4	30		
		6			8 074	9			41	8 722					9	41	9 370	8	40
		8			10 765	16			49	11 629					15	49	12 493	14	48
		10			13 457	25			55	14 537					24	54	15 617	22	54
	350	4	0.455	0.436	6 280	4	0.490	0.471	6 784	3	0.525	0.506	0.525	0.506	7 288	3	30		
		6			9 420	8			41	10 176					8	40	10 932	8	40
		8			12 560	15			48	13 568					13	48	14 576	13	48
		10			15 700	23			54	16 960					21	53	18 220	21	54
	400	4	0.520	0.498	7 177	3	0.560	0.538	7 753	3	0.600	0.578	0.600	0.578	8 329	3	30		
		6			10 765	7			40	11 629					7	40	12 493	7	40
		8			14 354	13			47	15 506					13	48	16 658	13	48
		10			17 942	20			53	19 382					20	53	20 822	20	54
	450	4	0.585	0.561	8 074	3	0.630	0.606	8 722	3	0.675	0.651	0.675	0.651	9 370	3	30		
		6			12 111	7			40	13 083					7	40	14 055	7	40
		8			16 148	12			47	17 444					12	47	18 740	12	48
		10			20 185	19			53	21 805					19	53	23 425	19	53
	500	4	0.650	0.623	8 971	3	0.700	0.673	9 691	3	0.750	0.723	0.750	0.723	10 411	3	30		
		6			13 457	7			40	14 537					7	40	15 617	7	41
		8			17 942	12			48	19 382					12	48	20 822	12	48
		10			22 428	19			53	24 228					19	54	26 028	19	54
	550	4	0.715	0.685	9 868	3	0.770	0.740	10 660	3	0.825	0.795	0.825	0.795	11 452	3	31		
		6			14 802	7			40	15 990					7	41	17 178	7	41
		8			19 737	12			48	21 321					12	48	22 905	12	49
		10			24 671	19			54	26 651					19	54	28 631	19	54
	600	4	0.780	0.748	10 765	3	0.840	0.808	11 629	3	0.900	0.868	0.900	0.868	12 493	3	29		
		6			16 148	6			39	17 444					6	40	18 740	6	40
		8			21 531	11			47	23 259					11	47	24 987	11	48
		10			26 914	17			53	29 074					17	53	31 234	17	53
	650	4	0.845	0.810	11 663	3	0.910	0.875	12 599	3	0.975	0.940	0.975	0.940	13 535	3	30		
		6			17 494	6			40	18 898					6	40	20 302	6	40
		8			23 325	11			47	25 197					11	48	27 069	11	48
		10			29 156	17			53	31 496					17	53	33 836	17	54
700	4	0.910	0.872	12 560	2	0.980	0.942	13 568	2	1.050	1.012	1.050	1.012	14 576	2	28			
	6			18 840	5			38	20 352					5	39	21 864	5	39	
	8			25 119	10			46	27 135					10	46	29 151	10	47	
	10			31 399	15			52	33 919					15	52	36 439	15	52	
800	4	1.040	0.997	14 354	2	1.120	1.077	15 506	2	1.200	1.157	1.200	1.157	16 658	2	29			
	6			21 531	5			39	23 259					5	39	24 987	5	40	
	8			28 708	10			46	31 012					10	47	33 316	10	47	
	10			35 885	15			52	38 765					15	53	41 645	15	53	
900	4	1.170	1.121	16 148	2	1.260	1.211	17 444	2	1.350	1.301	1.350	1.301	18 740	2	30			
	6			24 222	5			39	26 166					5	40	28 110	5	40	
	8			32 296	10			47	34 888					10	47	37 480	10	48	
	10			40 370	15			53	43 610					15	53	46 850	15	53	
1000	4	1.300	1.246	17 942	2	1.400	1.346	19 382	2	1.500	1.446	1.500	1.446	20 822	2	28			
	6			26 914	5			39	29 074					5	38	31 234	5	39	
	8			35 885	9			47	38 765					8	46	41 645	8	46	
	10			44 856	14			52	48 456					13	52	52 056	13	52	
1100	4	1.430	1.371	19 737	2			21 321	2					23 425	2	29			
	6			29 605	5			39	31 473					5	39	33 473	5	39	
	8			39 473	9			47	43 473					9	47	47 473	9	47	
	10			49 342	14			53	53 342					14	53	57 342	14	53	


The mcr FID S fire damper selection program is available at www.mercor.com.pl, in the Architect and Designer Zone.

3.7. estimated weights of mcr FID S/V p/P, mcr FID S/V-M p/P rectangular dampers [kg]

		width B [mm]														
		200	250	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
height H [mm]	200	9.5	9.7	10	10	15	17	17.5	19	22	25	28	30	33	39	45
	250	9.5	10	11	11	16	17.5	18	21	24	27	29	32	34	45	48
	300	10	11	11	12	17	20	21	23	26	28	31	34	38	50	51
	350	11	11	11	16	18	20.5	23	26	28	29	33	35	36	52	53
	400	10	11	12	18	19	21	25	29	30	33	35	36	39	54	55
	500	15	16	17	19	20	23	27	32	33	35	38	40	44	55	56
	600	17	17.5	20	21	30	26	30	35	37	39	43	48	52	56	58
	700	17.5	18	21	23	30	35	35	40	42	44	47	52	54	57	65
	800	20	21	22	24	29	35	37	41	43	49	52	57	60	62	78
	900	22	25	25	28	33	35	39	43	47	53	56	60	62	64	82
	1000	23	29	28	33	36	42	43	49	53	56	59	65	67	69	98
	1100	26	30	31	35	38	42	47	56	59	62	63	69	71		
	1200	32	33	35	36	40	49	53	56	61	71	72	73			
	1300	39	40	38	39	44	52	57	59	78	79	80				
	1400	42	45	48	39	48	56	63	65	80	82					
	1500	45	48	50	50	52	58	68	71	82	98					

For dampers with no actuator, subtract ~1 kg.

3.8. marking

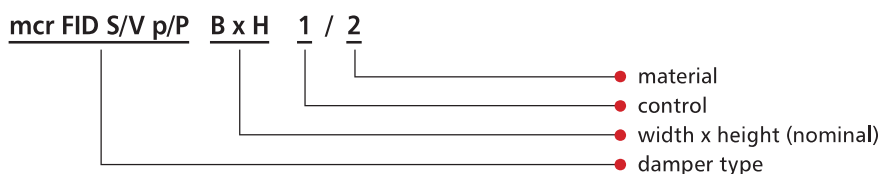

1 – control:

- Belimo trigger control mechanism
- BE24** – actuator with no return spring, U = 24 V AC/DC
- BLE24** – actuator with no return spring, U = 24 V AC/DC
- BE24-ST** (with the BKNE230-24 option) – actuator with no return spring, U = 24 V AC/DC, with a plug for the SBS Control system
- BLE24-ST** (with the BKNE230-24 option) – actuator with no return spring, U = 24 V AC/DC, with a plug for the SBS Control system
- BE230** – actuator with no return spring, U = 230 V AC
- BLE230** – actuator with no return spring, U = 230 V AC

2 – material

- [no symbol] – galvanised steel, Zn 275 g/m² coating
- KN** – 1.4404 acid-proof stainless steel

example marking:

mcr FID S/V p/P 400 x 400 BLE24

Smoke exhaust damper for fire ventilation systems with a 24 V compact Belimo actuator with limit switches.

Chapter 12 - power supply and control (p. 141) contains:

- technical specifications and connection diagrams for the trigger control mechanisms supporting the damper,
- location of trigger control mechanisms in relation to the damper - manufacture standards.